

ADAPTER - SC SIMPLEX/DUPLEX/QUAD

Product sheet
Adapter SC Simplex/
Duplex/Quad

V1.0, 2021-06-07

Micropol Fiberoptic AB
Älvdalsvägen 4
313 50 Åled

Phone: +46 (0)35 17 85 39
Mail: info@micropol.com

SC adapters are designed for mounting in panels with rectangular cutouts. SC adapters are compact and space saving with ceramic alignment sleeves which provide precision mating for both multimode and single mode applications. The SC-duplex adapters provides twice as many ports compared to the SC-simplex adapters.


FEATURES

- Premium One piece housing design / no welding point.
- Telcordia, ANSI, TIA/EIA and IEC Compliance.
- Patented one piece housing design prevents housing breakage.
- Various housing color to meet customer requirement.

TECHNICAL SPECIFICATION

Insertion loss	Typical 0.05
	Max 0.20
Flange	Available with flange and without flange
Colour	<ul style="list-style-type: none"> Blue (UPC) Green (APC) Beige Black Aqua
Sleeve type	Zirconia
Sleeve / Ferrule withdraw force	200gf - 600gf
Operating temp.	-40°C to +75°C
Durability	<0.1dB typical change, 500 matings

SC ADAPTER WITH FLANGE

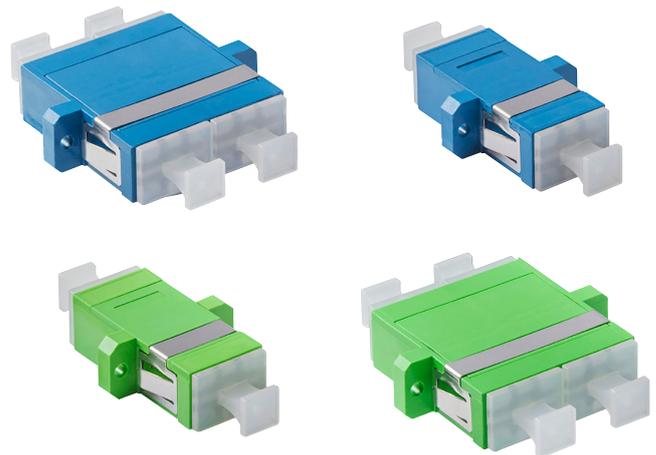

SC ADAPTER WITHOUT FLANGE

